



ZEBUNG 泽邦

惠泽四海 兴邦立事

河北泽邦塑胶科技有限公司
HEBEI ZEBUNG RUBBER TECHNOLOGY CO.,LTD

目录
CONTENTS



ZEBUNG 泽邦
惠泽四海 兴邦立事



公司简介	02
ABOUT US	
资质证书	04
QUALIFICATION CERTIFICATE	
试验设备	05
TEST EQUIPMENT	
生产现场	07
PRODUCTION LINE	
工业软管	
INDUSTRIAL HOSE	
超高分子量聚乙烯化学管	12
UHMWPE CHEMICAL HOSE	
超高分子量聚乙烯抗静电化学管	13
UHMWPE CHEMICAL ANTISTATIC HOSE	
EPDM食品管	14
EPDM FOOD HOSE	
NBR食品管	16
NBR FOOD HOSE	
隔震橡胶软管	17
ISOLATION RUBBER HOSE	
空气/水管	18
AIR/WATER HOSE	
吸排水管/空气管	19
WATER S&D HOSE/AIR HOSE	
液压油管	20
HYDRAULIC OIL HOSE	
柴油/汽油管	22
FUEL/DIESEL OIL HOSE	
飞机加油管	24
AIRCRAFT REFUELLING HOSE	
油罐车管	24
TANK TRUCK HOSE	
SAE 100R4 油管	25
SAE 100R4 HOSE	
SAE 100R6 油管	25
SAE 100R6 HOSE	
喷砂胶管	26
SAND BLAST RUBBER HOSE	
输送/吸排物料胶管	27
MATERIAL SUCTION AND DISCHARGE HOSE	
耐磨全胶管	28
WEAR RESISTANT RUBBER HOSE	
蒸汽/热水管	29
STEAM/HOT WATER HOSE	
散热器管	31
RADIATOR HOSE	
漂浮疏浚管	32
FLOATING DREDGING HOSE	
疏浚管	33
DREDGING HOSE	
大口径胶管	34
LARGE DIAMETER RUBBER HOSE	




河北泽邦塑胶科技有限公司成立于 2003 年，坐落于河北省衡水市景县开发区，毗邻天津港，交通便利。泽邦占地面积近 6 万平方米，员工 150 余名，年产值过亿。泽邦是集生产、研发、销售为一体的中低压橡胶软管龙头企业，主要生产海洋石油和天然气管、化学管、食品管、空气 / 水管、耐油管、耐磨管等工业流体胶管。泽邦在橡胶管路领域深耕几十年，多款产品均处于全球领先水平。在高端海洋油管领域，泽邦是国内唯一一家自主研发海洋外输油管的企业，产品通过了法国 BV 船级社关于 OCIMF GMPHOM 2009 标准的认证。泽邦秉承“汇泽四海，兴邦立事”的企业宗旨，从最前沿的科技领域不断研发，打造质量过硬的产品，服务全球客户。



Hebei Zebung Rubber Technology Co., Ltd was established in 2003,located at Development Zone,Jing County,Hengshui City,Hebei Province,China.with convenient transportation to the port of Xingang,Tianjin .Zebung covers an area of 60,000 square meters,and more than 150 employees.The annual output value is more than 100 million.Zebung is a leading enterprise for low pressure rubber hose,Combined with Production,Research & Development,Sales.Mainly products included: offshore oil hose,nature gas hose,chemical hose,food grade hose,air hose,water hose,oil-resistant hose, wear-resistant hose and other industrial fluid rubber hose.The company has been deeply engaged in the field of rubber hose for decades, and many products are at a global leading level. In the field of offshore oil hose,Zebung is the Unique original domestic enterprise which independently designing with full sets of advanced testing equipment for offshore oil hose.And have passed the certification with standard of OCIMF GMPHOM 2009 by French BUREAV VERITAS.Adhering to the enterprise philosophy of "Bring convenience to global users with common prosperity ",Zebung is at the forefront of science and technology,continuing to innovating,research and development,to create high-quality products to serve the business partners from all over the world.

资质证书 QUALIFICATION CERTIFICATE

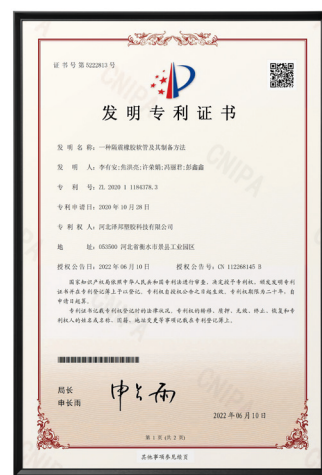

树立工业流体胶管行业标准 高品质生产研发基地

Set the industry standard for low pressure rubber hose high quality prooction research and development base

试验设备 TEST EQUIPMENT



吉门扭转试验 Jimon torsion test



拉伸试验 Tensile test



硫化试验 Vulcanization test



门尼粘度试验 Mooney viscosity test



抗臭氧试验
Ozone aging test




抗紫外线试验 UV resistance test



低温脆性试验
Low temperature brittleness test



阿克隆磨耗机 Akron abrasion machine

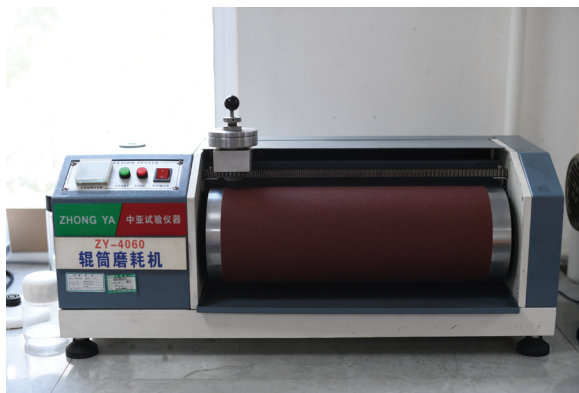

辊筒磨耗机 Roller abrasion machine




热老化试验箱 Hot aging oven tester



60 米生产线 60m Hose-making machine

引进意大利最新 VP 全自动生产设备，全自动 60 米硬芯成型机，电脑控制生产行程保证了胶管的精密度，均匀稳定是产品制作的质量保证。

The introduction of the latest Italian VP fully automatic production equipment for 60 meters hard mandrel spiral machine, computer control of the production stroke to ensure the precision of the hose, uniform stability is the quality assurance of product production.

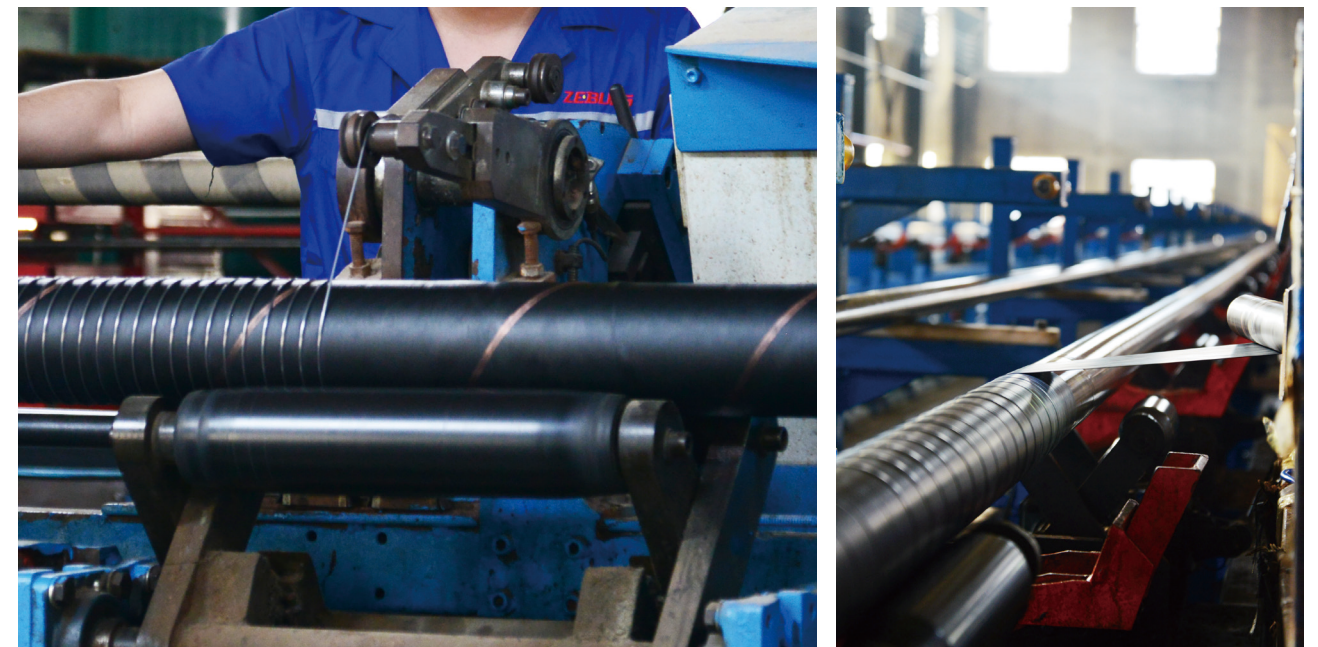

生产现场 PRODUCTION LINE



40 米生产线 40m Hose-making machine



生产现场 PRODUCTION LINE



大口径生产线 Large size hose production line



生产现场 PRODUCTION LINE



编织生产车间 Braiding workshop



原料胶片 Rubber film

生产现场 PRODUCTION LINE



密炼中心 Rubber Refining center



胶片裁剪 Rubber cutting

超高分子量聚乙烯化学管 UHMWPE CHEMICAL HOSE

内胶层: 超高分子量聚乙烯 + 三元乙丙橡胶

外胶层: 三元乙丙橡胶

工作温度: -40℃ ~90℃

安全系数: 3:1

颜色: 蓝色、绿色、黑色等

用途: 用于输送有强酸, 强碱等腐蚀性介质, 主要应用于新能源、食品、制药等行业。

Inner: UHMWPE+EPDM

Cover: EPDM

Working Temperature: -40℃ ~90℃

Safety Factor: 3:1 Color: Blue/Green/Black,etc

Application: Used for transporting corrosive media such as strong acids and alkalis, mainly used in industries such as new energy, food, pharmaceuticals, etc.

增强层: 帘子线缠绕 + 螺旋钢丝

Reinforcement layer: High-strength spiral textile cord with helix steel wire

增强层: 帘子线缠绕

Reinforcement layer: High-strength spiral textile cord



内径ID		工作压力 WP		最大长度 MAX LENGTH	内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch	bar		m	mm	inch	bar	m
19	3/4"	10~20		40	19	3/4"	10~20	40
25	1"	10~20		40	25	1"	10~20	40
32	1-1/4"	10~20		40	32	1-1/4"	10~20	40
38	1-1/2"	10~20		40	38	1-1/2"	10~20	40
51	2"	10~20		40	51	2"	10~20	40
64	2-1/2"	10~20		40	64	2-1/2"	10~20	40
76	3"	10~20		40	76	3"	10~20	40
102	4"	10~20		40	102	4"	10~20	40
152	6"	10~20		40				

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

超高分子量聚乙烯抗静电化学管 UHMWPE CHEMAICAL ANTISTATIC HOSE

内胶层: 抗静电超高分子量聚乙烯 + 三元乙丙橡胶

外胶层: 三元乙丙橡胶

工作温度: -40℃ ~90℃

安全系数: 3:1

颜色: 蓝色、绿色、黑色等

用途: 用于输送有强酸, 强碱等腐蚀性介质, 主要应用于新能源、食品、制药等行业。

Inner: ANTISTATIC UHMWPE+EPDM

Cover: EPDM

Working Temperature: -40℃ ~90℃

Safety Factor: 3:1 Color: Blue/Green/Black,etc

Application: Used for transporting corrosive media such as strong acids and alkalis, mainly used in industries such as new energy, food, pharmaceuticals, etc.

增强层: 帘子线缠绕 + 螺旋钢丝

Reinforcement layer: High-strength spiral textile cord with helix steel wire

增强层: 帘子线缠绕

Reinforcement layer: High-strength spiral textile cord



内径ID		工作压力 WP		最大长度 MAX LENGTH	内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch	bar		m	mm	inch	bar	m
19	3/4"	10~20		40	19	3/4"	10~20	40
25	1"	10~20		40	25	1"	10~20	40
32	1-1/4"	10~20		40	32	1-1/4"	10~20	40
38	1-1/2"	10~20		40	38	1-1/2"	10~20	40
45	1-3/4"	10~20		40	45	1-3/4"	10~20	40
51	2"	10~20		40	51	2"	10~20	40
57	2-1/4"	10~20		40	57	2-1/4"	10~20	40
64	2-1/2"	10~20		40	64	2-1/2"	10~20	40
76	3"	10~20		40	76	3"	10~20	40
102	4"	10~20		40	102	4"	10~20	40
152	6"	10~20		40				

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

EPDM 食品管 EPDM FOOD HOSE

内胶层: 三元乙丙橡胶

外胶层: 三元乙丙橡胶

工作温度: -40℃ ~150℃

安全系数: 3:1

颜色: 蓝色、绿色、黑色等

用途: 用于输送饮用水、饮料等非油脂类食品, 主要应用于食品加工行业。

Inner: EPDM

Cover: EPDM

Working Temperature: -40℃ ~150℃

Safety Factor: 3:1 Color: Blue/Green/Black,etc

Application: Used for transporting non greasy foods such as drinking water and beverages. Mainly used in the food processing industry.

增强层: 一层帘子线编织

Reinforcement layer: Single layer braiding with high-strength textile cord

增强层: 双层帘子线编织

Reinforcement layer: Double layer braiding with high-strength textile cord



		工作压力 WP		最大长度 MAX LENGTH		内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar	m	mm	inch	bar	m	mm	inch	bar	m
13	1/2"	20	100	13	1/2"	20	100	13	1/2"	20	100
16	5/8"	20	100	16	5/8"	20	100	16	5/8"	20	100
19	3/4"	20	100	19	3/4"	20	100	19	3/4"	20	100
25	1"	10	100	25	1"	20	100	25	1"	20	100

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

EPDM 食品管 EPDM FOOD HOSE

内胶层: 三元乙丙橡胶

外胶层: 三元乙丙橡胶

工作温度: -40℃ ~150℃

安全系数: 3:1

颜色: 蓝色、绿色、黑色等

用途: 用于输送饮用水、饮料等非油脂类食品, 主要应用于食品加工行业。

Inner: EPDM

Cover: EPDM

Working Temperature: -40℃ ~150℃

Safety Factor: 3:1 Color: Blue/Green/Black,etc

Application:Used for transporting non greasy foods such as drinking water and beverages. Mainly used in the food processing industry.

增强层: 帘子线缠绕 + 螺旋钢丝

Reinforcement layer: High-strength spiral textile cord with helix steel wire

增强层: 帘子线缠绕

Reinforcement layer: High-strength spiral textile cord



内径ID		工作压力 WP		最大长度 MAX LENGTH		内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar	m	mm	inch	bar	m	mm	inch	bar	m
19	3/4"	10~20	40	19	3/4"	10~20	40	19	3/4"	10~20	40
25	1"	10~20	40	25	1"	10~20	40	25	1"	10~20	40
32	1-1/4"	10~20	40	32	1-1/4"	10~20	40	32	1-1/4"	10~20	40
38	1-1/2"	10~20	40	38	1-1/2"	10~20	40	38	1-1/2"	10~20	40
45	1-3/4"	10~20	40	45	1-3/4"	10~20	40	45	1-3/4"	10~20	40
51	2"	10~20	40	51	2"	10~20	40	51	2"	10~20	40
57	2-1/4"	10~20	40	57	2-1/4"	10~20	40	57	2-1/4"	10~20	40
64	2-1/2"	10~20	40	64	2-1/2"	10~20	40	64	2-1/2"	10~20	40
76	3"	10~20	40	76	3"	10~20	40	76	3"	10~20	40
102	4"	10~20	40	102	4"	10~20	40	102	4"	10~20	40
152	6"	10~20	40								

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements


NBR 食品管 NBR FOOD HOSE

内胶层: 丁腈橡胶
外胶层: 丁腈橡胶
工作温度: -30℃ ~90℃
安全系数: 3:1 颜色: 蓝色
用途: 用于输送食用油, 牛奶等, 主要应用于食品加工行业。

Inner: NBR
Cover: NBR
Working Temperature: -30℃ ~90℃
Safety Factor: 3:1 Color: Blue
Application: Used for transporting edible oil, milk, etc. Mainly used in the food processing industry.

增强层: 帘子线缠绕 + 螺旋钢丝
Reinforcement layer: High-strength spiral textile cord with helix steel wire

增强层: 帘子线缠绕
Reinforcement layer: High-strength spiral textile cord

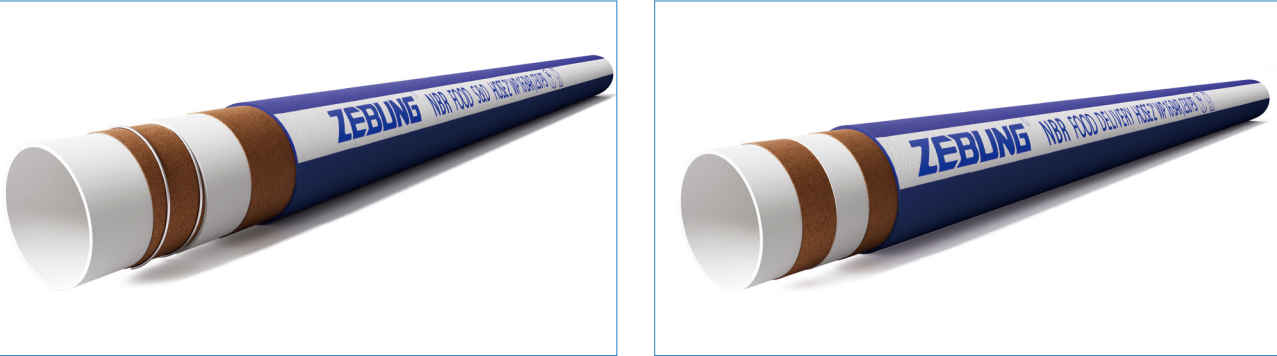

内径ID		工作压力 WP		最大长度 MAX LENGTH	内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch	bar		m	mm	inch	bar	m
19	3/4"	10~20		40	19	3/4"	10~20	40
25	1"	10~20		40	25	1"	10~20	40
32	1-1/4"	10~20		40	32	1-1/4"	10~20	40
38	1-1/2"	10~20		40	38	1-1/2"	10~20	40
45	1-3/4"	10~20		40	45	1-3/4"	10~20	40
51	2"	10~20		40	51	2"	10~20	40
57	2-1/4"	10~20		40	57	2-1/4"	10~20	40
64	2-1/2"	10~20		40	64	2-1/2"	10~20	40
76	3"	10~20		40	76	3"	10~20	40
102	4"	10~20		40	102	4"	10~20	40
152	6"	10~20		40				

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

隔震橡胶软管 ISOLATION RUBBER HOSE

内胶层: 三元乙丙橡胶
外胶层: 三元乙丙橡胶
增强层: 帘子线缠绕
工作温度: -40℃ ~150℃
安全系数: 4:1
颜色: 黑色
执行标准: JG/T541-2017
用途: 广泛应用于隔震建筑的隔震层中, 是隔震建筑的常用管道之一。
我们拥有该产品的发明专利

Inner: EPDM
Cover: EPDM
Reinforcement layer: High-strength spiral textile cord
Working Temperature: -40℃ ~150℃
Safety Factor: 4:1 Color: Black
STANDARD: JG/T541-2017
Application: Widely used for the isolation layer of earthquake-isolated buildings, it is one of the commonly flexible system for pipeline .
We have original unique patent for this hose



内径ID		工作压力 WP		长度 LENGTH	内径ID		工作压力 WP	长度 LENGTH
mm	inch	bar		m	mm	inch	bar	m
64	2-1/2"	5~20		1~3	152	6"	5~20	1~3
76	3"	5~20		1~3	203	8"	5~20	1~3
102	4"	5~20		1~3	254	10"	5~20	1~3
127	5"	5~20		1~3	304	12"	5~20	1~3

注: 规格、颜色等可以根据要求订制

Note: Specifications, colors, etc. can be customized according to requirements

空气 / 水管 AIR/WATER HOSE

内胶层: 天然 + 丁苯橡胶
外胶层: 天然 + 丁苯橡胶
工作温度: -20℃ ~80℃
安全系数: 3:1
颜色: 黑色
用途: 用于输送空气、水等介质, 主要应用于工业机械
设备、农业灌溉、建筑工程等行业。

Inner: NR+SBR
Cover: NR+SBR
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1
Color: Black
Application: Mainly used to transport air, water for
industry of machinery ,agriculture,construction etc.

增强层: 一层帘子线编织
Reinforcement layer: Single layer braiding with high-
strength textile cord

增强层: 双层帘子线编织
Reinforcement layer: Double vlayer braiding with
high-strength textile cord



内径ID		工作压力 WP		最大长度 MAX LENGTH		内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar		m		mm	inch	bar		m	
6	1/4"	20		100		6	1/4"	20		100	
8	5/16"	20		100		8	5/16"	20		100	
10	3/8"	20		100		10	3/8"	20		100	
13	1/2"	20		100		13	1/2"	20		100	
16	5/8"	20		100		16	5/8"	20		100	
19	3/4"	20		100		19	3/4"	20		100	
22	7/8"	10		100		22	7/8"	20		100	
25	1"	10		100		25	1"	20		100	

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

吸排水管 / 空气管 WATER S&D HOSE / AIR HOSE

内胶层: 天然 + 丁苯橡胶
外胶层: 天然 + 丁苯橡胶
工作温度: -20℃ ~80℃
安全系数: 3:1
颜色: 黑色
用途: 用于输送空气、水等介质, 主要应用于工业机械
设备、农业灌溉、建筑工程等行业。

Inner: NR+SBR
Cover: NR+SBR
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1
Color: Black
Application: Mainly used to transport air, water for
industry of machinery ,agriculture,construction etc.

增强层: 帘子线缠绕 + 螺旋钢丝
Reinforcement layer: High-strength spiral textile cord
with helix steel wire

增强层: 帘子线缠绕
Reinforcement layer: High-strength spiral textile
cord



内径ID		工作压力 WP		最大长度 MAX LENGTH		内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar		m		mm	inch	bar		m	
19	3/4"	10~20		60		19	3/4"	10~20		60	
25	1"	10~20		60		25	1"	10~20		60	
32	1-1/4"	10~20		60		32	1-1/4"	10~20		60	
38	1-1/2"	10~20		60		38	1-1/2"	10~20		60	
45	1-3/4"	10~20		60		45	1-3/4"	10~20		60	
51	2"	10~20		60		51	2"	10~20		60	
64	2-1/2"	10~20		60		64	2-1/2"	10~20		60	
76	3"	10~20		60		76	3"	10~20		60	
102	4"	10~20		60		102	4"	10~20		60	
127	5"	10~20		60		127	5"	10~20		30	
152	6"	10~20		60		152	6"	10~20		30	
203	8"	10~20		30							

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

液压油管 HYDRAULIC OIL HOSE

内胶层: 丁腈 + 丁苯橡胶
外胶层: 丁苯 + 氯丁橡胶
工作温度: -20℃ ~80℃
安全系数: 3:1
颜色: 黑色
用途: 用于输送液压油, 广泛应用于机械设备、工程车辆等的回油系统。

Inner: NBR+SBR
Cover: SBR+CR
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1
Color: Black
Application: Used for conveying hydraulic oil, widely used in the return oil system of mechanical equipment, engineering vehicles, etc.

增强层: 一层帘子线编织
Reinforcement layer: Single layer braiding with high-strength textile cord

增强层: 双层帘子线编织
Reinforcement layer: Double layer braiding with high-strength textile cord



内径ID		工作压力 WP		最大长度 MAX LENGTH	内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch	bar		m	mm	inch	bar	m
6	1/4"	20		100	6	1/4"	20	100
8	5/16"	20		100	8	5/16"	20	100
10	3/8"	20		100	10	3/8"	20	100
13	1/2"	20		100	13	1/2"	20	100
16	5/8"	20		100	16	5/8"	20	100
19	3/4"	20		100	19	3/4"	20	100
22	7/8"	10		100	22	7/8"	20	100
25	1"	10		100	25	1"	20	100

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

液压油管 HYDRAULIC OIL HOSE

内胶层: 丁腈 + 丁苯橡胶
外胶层: 丁苯 + 氯丁橡胶
工作温度: -20℃ ~80℃
安全系数: 3:1
颜色: 黑色
用途: 用于输送液压油, 广泛应用于机械设备、工程车辆等的回油系统。

Inner: NBR+SBR Cover: SBR+CR
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1
Color: Black
Application: Used for conveying hydraulic oil, widely used in the return oil system of mechanical equipment, engineering vehicles, etc.

增强层: 帘子线缠绕 + 螺旋钢丝
Reinforcement layer: High-strength spiral textile cord with helix steel wire

增强层: 帘子线缠绕
Reinforcement layer: High-strength spiral textile cord



内径ID		工作压力 WP		最大长度 MAX LENGTH	内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch	bar		m	mm	inch	bar	m
19	3/4"	10~20		60	19	3/4"	10~20	60
25	1"	10~20		60	25	1"	10~20	60
32	1-1/4"	10~20		60	32	1-1/4"	10~20	60
38	1-1/2"	10~20		60	38	1-1/2"	10~20	60
45	1-3/4"	10~20		60	45	1-3/4"	10~20	60
51	2"	10~20		60	51	2"	10~20	60
64	2-1/2"	10~20		60	64	2-1/2"	10~20	60
76	3"	10~20		60	76	3"	10~20	60
102	4"	10~20		60	102	4"	10~20	60
127	5"	10~20		60	127	5"	10~20	30
152	6"	10~20		60	152	6"	10~20	30
203	8"	10~20		30				

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

柴油 / 汽油管 FUEL/DIESEL OIL HOSE

内胶层: 丁腈橡胶
外胶层: 丁腈橡胶
工作温度: -30℃ ~120℃
安全系数: 3:1
颜色: 黑色
用途: 用于输送柴油汽油, 广泛应用于各类汽车、工程机械、农业机械、船舶等燃油传输系统中。

增强层: 一层帘子线编织
Reinforcement layer: Single layer braiding with high-strength textile cord

Inner: NBR
Cover: NBR
Working Temperature:- 30℃ ~120℃
Safety Factor:3:1
Color: Black
Application: Used for transporting diesel gasoline, widely used in various fuel transmission systems such as automobiles, engineering machinery, agricultural machinery, and ships.

增强层: 双层帘子线编织
Reinforcement layer: Double layer braiding with high-strength textile cord



内径ID		工作压力 WP		最大长度 MAX LENGTH		内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar		m		mm	inch	bar		m	
6	1/4"	20		100		6	1/4"	20		100	
8	5/16"	20		100		8	5/16"	20		100	
10	3/8"	20		100		10	3/8"	20		100	
13	1/2"	20		100		13	1/2"	20		100	
16	5/8"	20		100		16	5/8"	20		100	
19	3/4"	20		100		19	3/4"	20		100	
22	7/8"	10		100		22	7/8"	20		100	
25	1"	10		100		25	1"	20		100	

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

柴油 / 汽油管 DIESEL/GASOLINE HOSE

内胶层: 丁腈橡胶
外胶层: 丁腈橡胶
工作温度: -30℃ ~120℃
安全系数: 3:1
颜色: 黑色
用途: 用于输送柴油汽油, 广泛应用于各类汽车、工程机械、农业机械、船舶等燃油传输系统中。

增强层: 帘子线缠绕 + 螺旋钢丝 + 铜丝
Reinforcement layer: High-strength spiral textile cord with helix steel wire and copper wire

Inner: NBR
Cover: NBR
Working Temperature: -30℃ ~120℃
Safety Factor: 3:1
Color: Black
Application: Used for transporting diesel gasoline, widely used in various fuel transmission systems such as automobiles, engineering machinery, agricultural machinery, and ships.

增强层: 帘子线缠绕 + 铜丝
Reinforcement layer: High-strength spiral textile cord and copper wire



内径ID		工作压力 WP		最大长度 MAX LENGTH		内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar		m		mm	inch	bar		m	
19	3/4"	10~20		60		19	3/4"	10~20		60	
25	1"	10~20		60		25	1"	10~20		60	
32	1-1/4"	10~20		60		32	1-1/4"	10~20		60	
38	1-1/2"	10~20		60		38	1-1/2"	10~20		60	
45	1-3/4"	10~20		60		45	1-3/4"	10~20		60	
51	2"	10~20		60		51	2"	10~20		60	
64	2-1/2"	10~20		60		64	2-1/2"	10~20		60	
76	3"	10~20		60		76	3"	10~20		60	
102	4"	10~20		60		102	4"	10~20		60	
127	5"	10~20		60		127	5"	10~20		30	
152	6"	10~20		60		152	6"	10~20		30	
203	8"	10~20		30							

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

飞机加油管 AIRCRAFT REFUELLING HOSE 油罐车管 TANK TRUCK HOSE

内胶层：丁腈橡胶
外胶层：丁腈 + 氯丁橡胶
增强层：帘子线缠绕 + 螺旋钢丝 + 铜丝
工作温度：-30℃ ~120℃
安全系数：4:1
颜色：黑色
用途：用于民用航空、军事等不同领域的飞机加油作业。
Inner: NBR Cover: NBR+CR
Reinforcement layer: High-strength spiral textile cord with helix steel wire and copper wire
working temperature: -30℃ ~120℃
Safety factor: 4:1
Color: Black
Application: Used for aircraft refuelling operations in different field such as civil aviation and military.



内径ID		工作压力 WP		最大长度 MAX LENGTH		内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar		m		mm	inch	bar		m	
38	1-1/2"	10~20		60		38	1-1/2"	10~20		60	
51	2"	10~20		60		51	2"	10~20		60	
64	2-1/2"	10~20		60		64	2-1/2"	10~20		60	
76	3"	10~20		60		76	3"	10~20		60	
102	4"	10~20		60		102	4"	10~20		60	

注：规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

内胶层：丁腈橡胶
外胶层：丁腈 + 氯丁橡胶
增强层：帘子线缠绕 + 螺旋钢丝 + 铜丝
工作温度：-30℃ ~120℃
安全系数：3:1
颜色：黑色
用途：用于各种油罐车的装卸作业。
Inner: NBR Cover:NBR+CR
Reinforcement layer: High-strength spiral textile cord with helix steel wire and copper wire
Working Temperature: -30℃ ~120℃
Safety Factor: 3:1
Color: Black
Application: Used for loading and unloading operations of various oil tank trucks.



SAE 100R4 油管 /SAE 100R4 HOSE SAE 100R6 油管 / SAE 100R6 HOSE

内胶层：丁腈 + 丁苯橡胶
外胶层：丁苯 + 氯丁橡胶
增强层：帘子线缠绕 + 螺旋钢丝
工作温度：-20℃ ~80℃
安全系数：3:1 颜色：黑色
用途：用于各种机械设备中石油基液压油的输送
Inner: NBR+SBR
Cover: SBR+CR
Reinforcement layer: High-strength spiral textile cord with helix steel wire
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1 Color: Black
Application: Used for conveying petroleum based hydraulic oil in various mechanical equipment.



内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar		m	
3/4"	19	21		60	
1"	25	17		60	
1-1/4"	32	14		60	
1-1/2"	38	10.5		60	
1-3/4"	45	10		60	
2"	51	7		60	
2-1/2"	64	4		60	
3"	76	4		60	
3-1/2"	89	4		60	
4"	102	4		60	

注：规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

内胶层：丁腈 + 丁苯橡胶
外胶层：丁苯 + 氯丁橡胶
增强层：一层帘子线编织
工作温度：-20℃ ~80℃
安全系数：3:1 颜色：黑色
用途：用于各种机械设备中石油基液压油的输送
Inner: NBR+SBR
Cover: SBR+CR
Reinforcement layer: Single layer braiding with high-strength textile cord
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1 Color: Black
Application: Used for conveying petroleum based hydraulic oil in various mechanical equipment.



内径ID		工作压力 WP		最大长度 MAX LENGTH	
mm	inch	bar		m	
1/4"	6	28		100	
5/16"	8	28		100	
3/8"	10	28		100	
1/2"	13	28		100	
5/8"	16	24		100	
3/4"	19	21		100	

喷砂胶管 SAND BLAST RUBBER HOSE

内胶层: 天然 + 顺丁橡胶
外胶层: 天然 + 丁苯橡胶
工作温度: -20℃ ~80℃
安全系数: 3:1 颜色: 黑色
用途: 输送石英砂, 钢砂等小颗粒状物体。用于喷砂机
械和设备中的磨料输送系统, 为工件表面抛去锈层和旧
涂层, 达到清洁和准备表面新涂层的效果。

增强层: 一层 / 双层帘子线编织
Reinforcement layer: Single layer/Double layer
braiding with high-strength textile cord



内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch	bar	m
10	3/8"	20	100
13	1/2"	20	100
16	5/8"	20	100
19	3/4"	20	100
22	7/8"	10	100
25	1"	10	100

Inner: NR+BR Cover: NR+SBR
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1 Color: Black
Application: Conveying small granular objects such
as quartz sand and steel grit. Used for abrasive
conveying systems in sandblasting machinery,
equipment,vessels to remove rust and old coatings
from the surface of workpieces, achieving the effect of
cleaning and preparing new coatings on the surface.

增强层: 帘子线缠绕
Reinforcement layer: High-strength spiral textile
cord



内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch	bar	m
19	3/4"	10~20	60
25	1"	10~20	60
32	1-1/4"	10~20	60
38	1-1/2"	10~20	60
45	1-3/4"	10~20	60
51	2"	10~20	60
64	2-1/2"	10~20	60
76	3"	10~20	60
102	4"	10~20	60
127	5"	10~20	60
152	6"	10~20	60

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

输送 / 吸排物料胶管 MATERIAL SUCTION AND DISCHARGE HOSE

内胶层: 天然 + 顺丁橡胶
外胶层: 天然 + 丁苯橡胶
工作温度: -20℃ ~80℃
安全系数: 3:1 颜色: 黑色
用途: 输送颗粒状物料、泥浆等, 广泛应用于建筑、矿
山等行业。

增强层: 帘子线缠绕 + 螺旋钢丝
Reinforcement layer: High-strength spiral textile cord
with helix steel wire



Inner: NR+BR Cover: NR+SBR
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1 Color: Black
Application: Conveying granular materials, mud, etc.,
widely used in industries such as construction and
mining.

增强层: 帘子线缠绕
Reinforcement layer: High-strength spiral textile
cord



内径ID		工作压力 WP	最大长度 MAX LENGTH	内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch	bar	m	mm	inch	bar	m
19	3/4"	10~20	60	19	3/4"	10~20	60
25	1"	10~20	60	25	1"	10~20	60
32	1-1/4"	10~20	60	32	1-1/4"	10~20	60
38	1-1/2"	10~20	60	38	1-1/2"	10~20	60
45	1-3/4"	10~20	60	45	1-3/4"	10~20	60
51	2"	10~20	60	51	2"	10~20	60
64	2-1/2"	10~20	60	64	2-1/2"	10~20	60
76	3"	10~20	60	76	3"	10~20	60
102	4"	10~20	60	102	4"	10~20	60
127	5"	10~20	60	127	5"	10~20	30
152	6"	10~20	60	152	6"	10~20	30
203	8"	10~20	30				

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

耐磨全胶管 WEAR RESISTANT RUBBER HOSE

内胶层: 天然 + 顺丁橡胶
外胶层: 天然 + 丁苯橡胶
工作温度: -20℃ ~80℃
安全系数: 3:1
颜色: 黑色, 棕色
用途: 输送石灰, 砂石等颗粒状物体, 广泛应用于建筑、矿山等行业。

Inner: NR+BR Cover: NR+SBR
Working Temperature: -20℃ ~80℃
Safety Factor: 3:1
Color: Black,brown
Application: Conveying granular objects such as lime and sand, widely used in industries such as construction and mining.



内径ID			壁厚			最大长度 MAX LENGTH		
mm			mm			m		
102			4~6			5		
114			4~6			5		
125			4~6			5		
140			4~6			5		
152			4~6			5		
168			4~6			5		
180			4~6			5		
203			4~6			5		
219			4~6			5		

注: 规格、颜色等可以根据要求订制

Note: Specifications, colors, etc. can be customized according to requirements

蒸汽 / 热水管 STEAM/HOT WATER HOSE

内胶层: 三元乙丙橡胶
外胶层: 三元乙丙橡胶
工作温度: -40℃ ~150℃
安全系数: 3:1
颜色: 黑色、蓝色、绿色等
用途: 用于输送高温蒸汽或热水的场合, 广泛应用于石油化工、汽车制造业、冶金、电力等领域。

Inner: EPDM Cover: EPDM
Working Temperature: -40℃ ~150℃
Safety Factor: 3:1 Color :Black,Blue,Green,etc
Application:Used for conveying high-temperature steam or hot water, widely used in petrochemical, automotive manufacturing, metallurgy, power and other fields.

增强层: 一层帘子线编织
Reinforcement layer: Single layer braiding with high-strength textile cord

增强层: 双层帘子线编织
Reinforcement layer: Double layer braiding with high-strength textile cord



内径ID			工作压力 WP			最大长度 MAX LENGTH		
mm			bar			m		
6			10~20			100		
8			10~20			100		
10			10~20			100		
13			10~20			100		
16			10~20			100		
19			10~20			100		
25			10~20			100		

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

蒸汽 / 热水管 STEAM/HOT WATER HOSE

内胶层：三元乙丙橡胶
外胶层：三元乙丙橡胶
工作温度：-40℃ ~150℃
安全系数：3:1
颜色：黑色、蓝色、绿色等
用途：用于输送高温蒸汽或热水的场合，广泛应用于石油化工、汽车制造业、冶金、电力等领域。

Inner: EPDM Cover: EPDM
Working Temperature: -40℃ ~150℃
Safety Factor: 3:1 Color: Black,Blue,Green,etc
Application: Used for conveying high-temperature steam or hot water, widely used in petrochemical, automotive manufacturing, metallurgy, power and other fields.

增强层：帘子线缠绕 + 螺旋钢丝
Reinforcement layer: High-strength spiral textile cord with helix steel wire

增强层：帘子线缠绕
Reinforcement layer: High-strength spiral textile cord



内径ID		工作压力 WP	最大长度 MAX LENGTH	内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch			mm	inch		
19	3/4"	10~20	60	19	3/4"	10~20	60
25	1"	10~20	60	25	1"	10~20	60
32	1-1/4"	10~20	60	32	1-1/4"	10~20	60
38	1-1/2"	10~20	60	38	1-1/2"	10~20	60
45	1-3/4"	10~20	60	45	1-3/4"	10~20	60
51	2"	10~20	60	51	2"	10~20	60
64	2-1/2"	10~20	60	64	2-1/2"	10~20	60
76	3"	10~20	60	76	3"	10~20	60
102	4"	10~20	60	102	4"	10~20	60

注：规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

散热器管 RADIATOR HOSE

内胶层：三元乙丙橡胶
外胶层：三元乙丙橡胶
增强层：帘子线缠绕
工作温度：-40℃ ~150℃
安全系数：3:1
颜色：黑色
用途：用于汽车的散热系统中，用于连接散热器和发动机的水管，起着传导冷却剂、降低水温的作用。广泛应用于轿车、商用车、工程车等各类汽车上。

Inner: EPDM
Cover: EPDM
Reinforcement layer: High-strength spiral textile cord
Working Temperature: -40℃ ~150℃
Safety Factor: 3:1 Color: Black
Application: In the heat dissipation system of automobiles, the water pipe used to connect the radiator and engine plays a role in conducting coolant and reducing water temperature. Widely used in various types of vehicles such as sedans, commercial vehicles, and engineering vehicles.



内径ID		工作压力 WP	最大长度 MAX LENGTH	内径ID		工作压力 WP	最大长度 MAX LENGTH
mm	inch			mm	inch		
19	3/4"	5~10	100	60		5~10	60
22	7/8"	5~10	100	64	2-1/2"	5~10	60
25	1"	5~10	100	70		5~10	60
28		5~10	60	76	3"	5~10	60
30		5~10	60	80		5~10	60
32	1-1/4"	5~10	60	89	3-1/2 "	5~10	60
36		5~10	61	102	4"	5~10	60
				114		5~10	60
				127	5"	5~10	60

注：规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

漂浮疏浚管 FLOATING DREDGING HOSE

内胶层: 天然 + 顺丁橡胶

增强层: 帘子线缠绕

浮体层: 闭孔 PE 泡沫

外胶层: 顺丁 + 三元乙丙橡胶

工作温度: -20℃ ~80℃

安全系数: 3:1

颜色: 黑色 + 环状橘色色带

用途: 用于河道、湖泊、港口等水域中的沉淀物疏浚、淤泥清理等工作。该产品具有承载能力强、耐腐蚀、抗氧化、使用寿命长、维护成本低等优点, 是当前水利工程中必不可少的一种工程设备。

Inner: NR+BR

Reinforcement layer: High-strength spiral textile cord

Float layer: Closed cell PE foam


Cover: BR+EPDM

Working Temperature: -20℃ ~80℃

Safety Factor: 3:1

Color: Black+Spiral with helical orange stripe

Used for sediment dredging and sludge cleaning in rivers,lakes,ports. This product has the advantages of strong load-bearing capacity, corrosion resistance, oxidation resistance, long service life, and low maintenance cost, making it an essential engineering equipment in current water conservancy engineering.

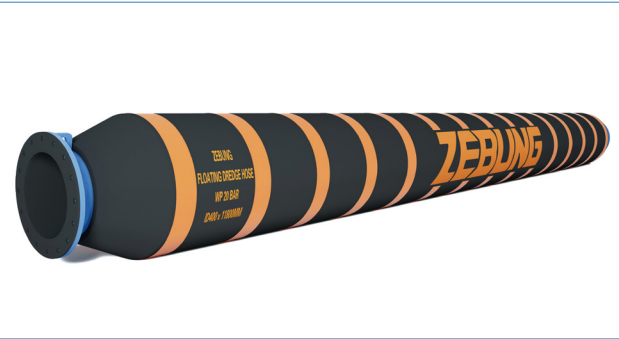

内径 ID		压力 WP	最大长度LENGTH
mm	inch	bar	m
200	8	10~20	11.8
250	10	10~20	11.8
300	12	10~20	11.8
350	14	10~20	11.8
400	16	10~20	11.8
450	18	10~20	11.8
500	20	10~20	11.8
600	24	10~20	11.8
800	32	10~20	11.8
1100	44	10~20	11.8

注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

疏浚管 DREDGING HOSE

内胶层: 天然 + 顺丁橡胶

- 增强层:
- 1. 帘子线缠绕
 - 2. 帘子线缠绕 + 螺旋钢丝
 - 3. 帘子线缠绕 + 钢环

根据管子的应用情况来选择增强层的类型

外胶层: 顺丁 + 三元乙丙橡胶

工作温度: -20℃ ~80℃ 安全系数: 3:1 颜色: 黑色

用途: 用于河道、湖泊、港口等水域中的沉淀物疏浚、淤泥清理等工作。用于和刚性管道连接, 是当前水利工程中必不可少的一种工程设备。

Inner: NR+BR

Reinforcement laye:

- 1.High-strength spiral textile cord
- 2.High-strength spiral textile cord with helix steel wire
- 3.High-strength spiral textile cord with steel ring

Choose the type of reinforcement layer based on the application of the hose

Cover: BR+EPDM Working Temperature: -20℃ ~80℃

Safety Factor: 3:1 Color: Black

Used for sediment dredging and sludge cleaning inrivers,lakes,ports,etc.Used for connecting with rigid pipelines, it is an essential engineering equipment in current water conservancy projects.



内径 ID		压力 WP	最大长度LENGTH
mm	inch	bar	m
200	8	10~20	11.8
250	10	10~20	11.8
300	12	10~20	11.8
350	14	10~20	11.8
400	16	10~20	11.8
450	18	10~20	11.8
500	20	10~20	11.8
600	24	10~20	11.8
800	32	10~20	11.8
1100	44	10~20	11.8


注: 规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

大口径胶管 LARGE DIAMETER RUBBER HOSE

公司生产的大口径橡胶管可以输送空气、水、液压油、柴汽油、原油、泥浆、散装物料、腐蚀性介质等，可以根据客户的要求选择不同的胶料，设计不同的工艺以满足客户的各种实际需求。同时我们也可以生产各种类型带法兰的胶管，法兰的材质、标准都可以按客户要求订制。

The large-diameter rubber hoses produced by our company can be used to transport air, water, hydraulic oil, diesel gasoline, crude oil, mud, bulk materials, corrosive media, etc. Different rubber materials can be selected according to customer requirements, and different processes can be designed to meet various actual needs of customers. At the same time, we can also produce various types of rubber hoses with flanges, and the materials and standards of the flange can be customized according to customers' requirements.

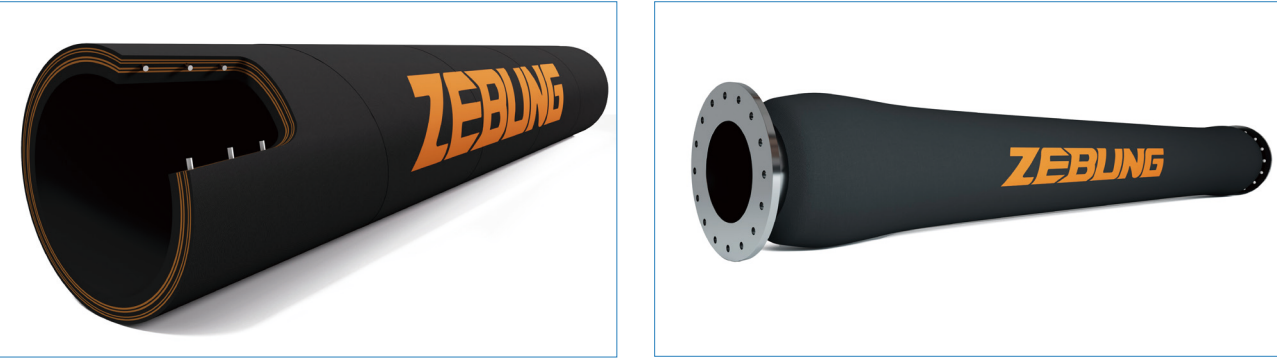

内径 ID		压力 WP	最大长度LENGTH
mm	inch	bar	m
200	8	10~20	11.8
250	10	10~20	11.8
300	12	10~20	11.8
350	14	10~20	11.8
400	16	10~20	11.8
450	18	10~20	11.8
500	20	10~20	11.8
600	24	10~20	11.8
800	32	10~20	11.8
1100	44	10~20	11.8

注：规格、压力、颜色等可以根据要求订制

Note: Specifications, pressures, colors, etc. can be customized according to requirements

报价信息采集表 QUOTATION REQUIRED

为了更好的匹配设计，请尽可能全面的填写如下信息：

please complete as fully as possible to facilitate best design

1. 客户信息 (Customer) : _____

2. 应用领域 (Port/Field) : _____

3. 使用工况 (Operational Conditions) : _____

4. 用途 (Purpose) : 吸排 (Suction& Discharge) ☐ 排 (Discharge) ☐

5. 介质 (Medium) : 水 (Water) ☐ 空气 (Air) ☐ 油 (Oil) ☐

食品 (Food) ☐ 化学品 (Chemicals) ☐

6. 工作压力 (Working Pressure) : _____

7. 爆破压力 (Bursting pressure) : _____

8. 工作温度 (Working Temperature) : _____

9. 胶管 (Hose) : 尺寸 (Size) _____ 导电性能 (Conductive) ☐

长度 (Length) _____ 颜色 (Color) _____

10. 包装 (Packing) : 材质 (Material) _____ 颜色 (Color) _____

11. 接头配件 (Connectors) : _____

12. 报价日期 (Required date of Quotation) : _____

13. 交货期 (Required of delivery) : _____

14. 起运港 (Loading Port) : _____

15. 目的港 (Destination port) : _____

16. 成交方式 (Trade Term) : EXW ☐ FOB ☐ CIF ☐

17. 支付方式 (Currency) : 美金 (US Dollars) ☐

人民币 (Chinese RMB) ☐

其他 (Others) ☐



ZEBUNG 泽邦
—— 惠泽四海 兴邦立事 ——

地址：河北省衡水市景县工业园区

Address: Development Zone, Jing County,
Hengshui City, Hebei Province, China

Email: zebang@chinarubberhose.com

English Web: www.zebungrubberhose.com

中文网站: www.zebunghose.com

电话: 0318-4319997 / 4311081

手机: 13803189164 / 18832810569



官方微信公众号



官方抖音号